



FlexSecure FS50

The FlexSecure FS50 rates High Security per the ISO 7712:2013 testing standard and is C-TPAT and PIP compliant. This versatile seal fits many applications and is popular for sealing bulk railcars and intermodal containers and trailers. The non-preform cable frays wildly when cut and is galvanized for corrosion protection.

The patent pending locking mechanism inside the anodized aluminum housing makes sure your goods are safe in transit.

C-TPAT & PIP COMPLIANT 

APPLICATIONS

- Cross Border Shipments
- Container Door Latches
- High Value Shipments
- Rail Cars
- Trailer Door Latches

FEATURES


- Available as a Standard Product
 - Order online and GET IT NOW, FOR LESS!
- ISO 17712 classification - High Security
- Tamper-evident non-preformed steel cable unravels when cut.
- Available in a variety of colors
- Can be customized by laser printing a name, logo, consecutive numbers and barcode

MATERIAL

- Main body: Aluminum alloy
- Internal Locking Components: Zinc and Steel
- Cable: 5.0 mm galvanized non-preformed aircraft cable

STRENGTH CHARACTERISTICS

- Average pull apart strength: 3000 lbs. (1361kg)

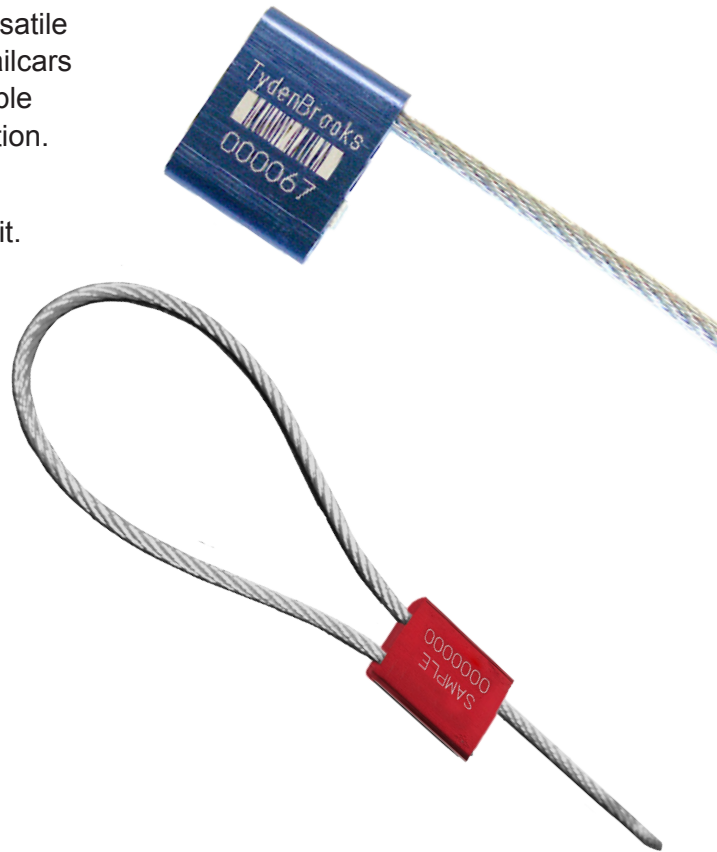

FlexSecure FS50

DIMENSIONS

Body: 1.12" x 1.54" x 0.35" (28.6mm x 39.0mm x 8.9mm)

Cable Diameter: 5.0 mm (3/16")

Overall length: Standard 12" (Custom lengths available)

MARKING/PRINTING

- Minimum quantities apply to customized versions of this product – please call for details
- Laser Printing: Name, logo, consecutive numbers, barcode

COLORS

- Standard Colors: Red / Blue / Black / Green



PACKAGING

- Standard
 - 20 per bag, 200 seals per carton
 - Box dimensions: 13"x 12"x 8" (33.0cm x 30.5cm x 20.3cm)
 - Weight: 29.5lbs. (14kg)

